



STANDARD PANEL

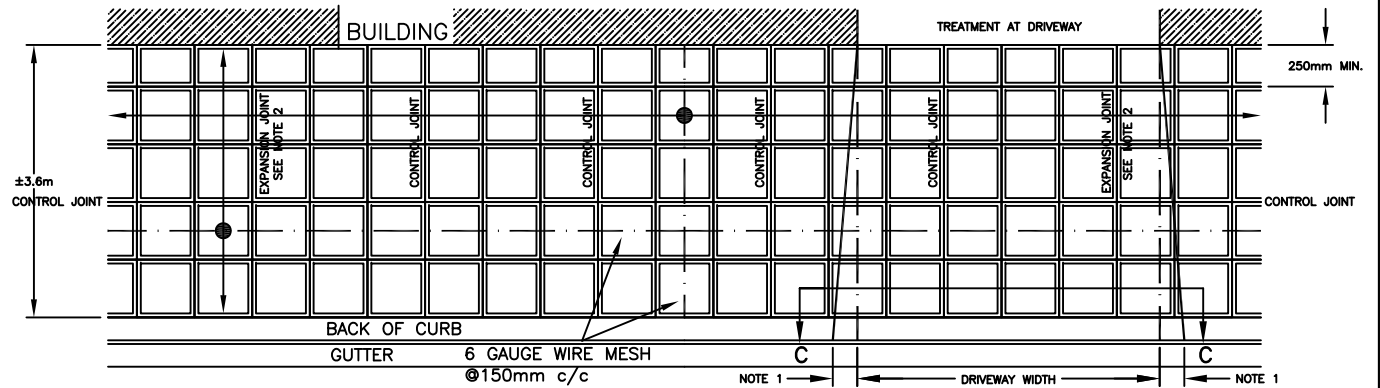


SIDEWALK PLAN

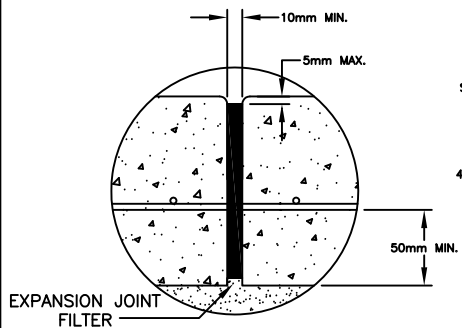


EXPANSION JOINT DETAIL

CONTROL JOINT DETAIL

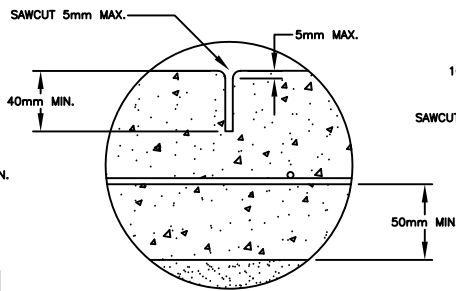


DUMMY JOINT DETAIL




NOTES:

1. TAPER WIDTH AT BOC SHALL BE 0.3m FOR RESIDENTIAL DRIVEWAYS, ADN 1.5m FOR COMMERCIAL PARKING LOTS, SCHOOLS AND APARTMENTS.
2. EXPANSION JOINTS ARE REQUIRED IN SIDEWALK AT 12m INTERVALS MAXIMUM AND TO ISOLATE OBSTRUCTION FROM SIDEWALK; EG. HYDRANTS, LIGHT STANDARDS, ETC.
3. MEDIUM BROOM FINISH IS REQUIRED FOR CONCRETE SURFACE.
4. DUMMY JOINTS SHALL BE STANDARD SPACING OF 760mm, WITH CONTROL JOINTS AT AS STANDARD 2280mm SPACING.
5. ALL CONCRETE EDGES OF BAYS TO BE FINISHED WITH 50mm EDGERS, 5mm RADIUS.
6. SIDEWALK CROSSFALL TO BE MAINTAINED AT MINIMUM COMMENSURATE WITH DEPARTURE OR BREAKOVER REQUIREMENTS.
7. ALL DIMENSIONS ARE IN METRIC UNITS
8. 100mm GRAN "A" BASE IS TO BE PLACED UNDER SIDEWALKS IN CLAY AREAS

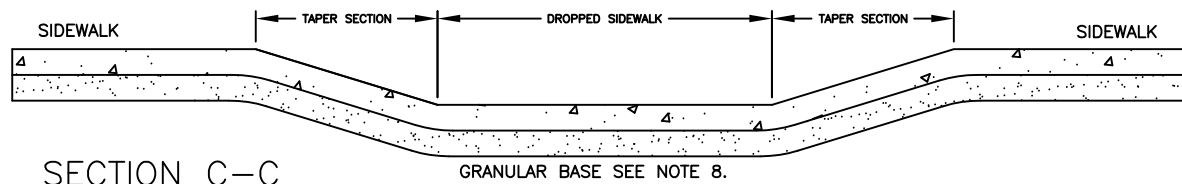

SECTION C-C
N.T.S.

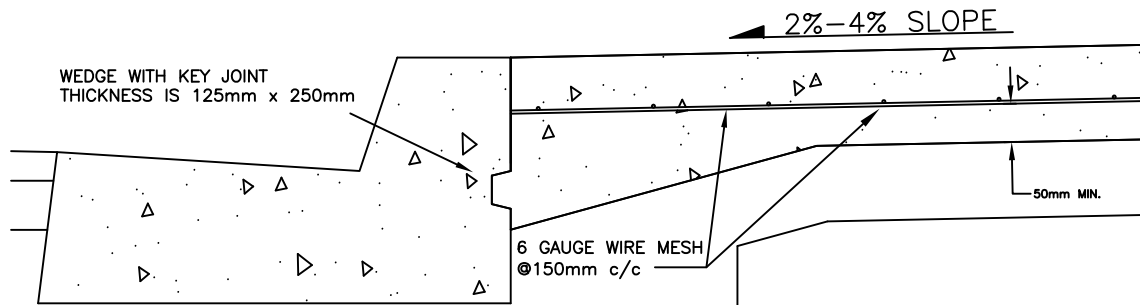

TYPICAL CROSS SECTION

CITY OF SARNIA

CHRISTINA STREET CONCRETE SIDEWALK

APPROVED BY:

DRAWN BY: C. HARPER

CH'K BY:

SCALE: N.T.S.

DATE: 01/08

112-G